



Security Target Junos OS 19.1R2 for EX2300, EX2300-C and EX3400

Juniper Networks

Version 1.5

April 17, 2020

Prepared for:
Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, CA 94089
www.juniper.net

Abstract

This document provides the basis for an evaluation of a specific Target of Evaluation (TOE), Junos OS 19.1R2 EX2300, EX2300-C, EX3400. This Security Target (ST) is conformant to the requirements of Collaborative Protection Profile for Network Devices v2.1 ([NDcPP2.1]).

References

- [CC1] Common Criteria for Information Technology Security Evaluation, Part 1: Introduction and General Model, CCMB-2017-04-001, Version 3.1 Revision 5, April 2017
- [CC2] Common Criteria for Information Technology Security Evaluation, Part 2: Security Functional Components, CCMB-2017-04-002, Version 3.1 Revision 5, April 2017.
- [CC3] Common Criteria for Information Technology Security Evaluation, Part 3: Security Assurance Components, CCMB-2017-04-003, Version 3.1 Revision 5, April 2017
- [CEM] Common Methodology for Information Technology Security Evaluation, Evaluation Methodology, CCMB-2017-04-004, Version 3.1, Revision 5, April 2017.
- [CC_Add] CC and CEM Addenda, Exact Conformance, Selection-Based SFRs, Optional SFRs, CCDB-2017-05-xxx, Version 0.5, May 2017
- [NDcPP2.1] Collaborative Protection Profile for Network Devices (NDcPP), Version 2.1, 24-September-2018
- [SD] Supporting Document, Evaluation Activities for Network Device cPP, September-2018, version 2.1

Table of Contents

1	Introduction	5
1.1	EX ST reference	5
1.2	TOE Reference.....	5
1.3	About this document	5
1.4	Document Conventions	5
1.5	TOE Overview.....	6
1.6	TOE Description.....	6
1.6.1	Overview	6
1.6.2	Physical boundary	7
1.6.3	Logical Scope of the TOE.....	8
1.6.4	Non-TOE hardware/software/firmware	10
1.6.5	Summary of out scope items	10
2	Conformance Claim.....	11
2.1	CC Conformance Claim	11
2.2	PP Conformance claim	11
2.3	Conformance Rationale	11
2.4	Technical Decisions	11
3	Security Problem Definition	14
3.1	Threats	14
3.2	Assumptions.....	16
3.3	Organizational Security Policies.....	17
4	Security Objectives.....	18
4.1	Security Objectives for the TOE	18
4.2	Security Objectives for the Operational Environment.....	18
4.3	Security Objectives rationale	19
5	Security Functional Requirements.....	20
5.1	Security Audit (FAU).....	20
5.1.1	Security Audit Data generation (FAU_GEN).....	20
5.1.2	Security audit event storage (Extended – FAU_STG_EXT).....	22
5.2	Cryptographic Support (FCS).....	22
5.2.1	Cryptographic Key Management (FCS_CKM).....	22
5.2.2	Cryptographic Operation (FCS_COP)	23
5.2.3	FCS_RBG_EXT.1 Random Bit Generation	24
5.2.4	Cryptographic Protocols (Extended – FCS_SSHS_EXT SSH Protocol).....	24
5.3	Identification and Authentication (FIA)	25
5.3.1	Authentication Failure Management (FIA_AFL)	25

5.3.2	Password Management (Extended – FIA_PMG_EXT).....	25
5.3.3	User Identification and Authentication (Extended – FIA_UIA_EXT)	25
5.3.4	User authentication (FIA_UAU) (Extended – FIA_UAU_EXT).....	26
5.4	Security Management (FMT)	26
5.4.1	Management of functions in TSF (FMT_MOF).....	26
5.4.2	Management of TSF Data (FMT_MTD)	26
5.4.3	Specification of Management Functions (FMT_SMF).....	27
5.4.4	Security management roles (FMT_SMR)	27
5.5	Protection of the TSF (FPT)	27
5.5.1	Protection of TSF Data (Extended – FPT_SKP_EXT)	27
5.5.2	Protection of Administrator Passwords (Extended – FPT_APW_EXT).....	28
5.5.3	TSF testing (Extended – FPT_TST_EXT)	28
5.5.4	Trusted Update (FPT_TUD_EXT)	28
5.5.5	Time stamps (Extended – FPT_STM_EXT))	28
5.6	TOE Access (FTA).....	28
5.6.1	TSF-initiated Session Locking (Extended – FTA_SSL_EXT)	28
5.6.2	Session locking and termination (FTA_SSL)	29
5.6.3	TOE access banners (FTA_TAB).....	29
5.7	Trusted path/channels (FTP).....	29
5.7.1	Trusted Channel (FTP_ITC).....	29
5.7.2	Trusted Path (FTP_TRP).....	29
6	Security Assurance Requirements	31
7	TOE Summary Specification	32
7.1	Protected communications.....	32
7.1.1	Algorithms and zeroization	32
7.1.2	Random Bit Generation	35
7.1.3	SSH	36
7.2	Administrator Authentication.....	39
7.3	Correct Operation	41
7.4	Trusted Update	42
7.5	Audit.....	42
7.6	Management.....	44
8	Rationales.....	46
8.1	SFR dependency analysis	46
9	Glossary.....	48

1 Introduction

1. This section identifies the Security Target (ST), Target of Evaluation (TOE), Security Target organization, document conventions, and terminology. It also includes an overview of the evaluated products.

1.1 EX ST reference

ST Title	Security Target Junos OS 19.1R2 for EX2300, EX2300-C and EX3400
ST Revision	1.5
ST Draft Date	April 17, 2020
Author	Juniper Networks, Inc.
cPP/EP Conformance	[NDcPP2.1] Collaborative Protection Profile for Network Devices (NDcPP), Version 2.1, 24-September-2018

1.2 TOE Reference

TOE Title	Junos OS 19.1R2 EX2300, EX2300-C, EX3400
TOE Firmware	Junos OS 19.1R2

1.3 About this document

2. This Security Target follows the following format:

Section	Title	Description
1	Introduction	Provides an overview of the TOE and defines the hardware and firmware that make up the TOE as well as the physical and logical boundaries of the TOE
2	Conformance Claims	Lists evaluation conformance to Common Criteria versions, Protection Profiles, or Packages where applicable
3	Security Problem Definition	Specifies the threats, assumptions and organizational security policies that affect the TOE
4	Security Objectives	Defines the security objectives for the TOE/operational environment and provides a rationale to demonstrate that the security objectives satisfy the threats
5	Security Functional Requirements	Contains the functional requirements for this TOE
6	Security Assurance Requirements	Contains the assurance requirements for this TOE
7	TOE Summary Specification	Identifies the IT security functions provided by the TOE and also identifies the assurance measures targeted to meet the assurance requirements

Table 1 Document Organization

1.4 Document Conventions

3. This document follows the same conventions as those applied in [NDcPP2.1] in the completion of operations on Security Functional Requirements, namely:
 - Unaltered SFRs are stated in the form used in [CC2] or their extended component definition (ECD);
 - Refinement made in the ST: the refinement text is indicated with **bold text** and ~~strikethroughs~~;
 - Selection completed in the ST: the selection values are indicated with underlined text

e.g. “[selection: disclosure, modification, loss of use]” in [CC2] or an ECD might become “disclosure” (completion);

- Assignment completed in the ST: indicated with *italicized text*;
- Assignment completed within a selection in the ST: the completed assignment text is indicated with *italicized and underlined text*

e.g. “[selection: change_default, query, modify, delete, [assignment: other operations]]” in [CC2] or an ECD might become “change_default, select_tag” (completion of both selection and assignment);

- Iteration: indicated by adding a string starting with “/” (e.g. “FCS_COP.1/Hash”).

1.5 TOE Overview

4. The Target of Evaluation (TOE) is Juniper Networks, Inc. Junos OS 19.1R2 executing on **EX2300, EX2300-C and EX3400** Ethernet Switch.
5. Juniper Networks EX Series Ethernet Switches provide scalable connectivity for the enterprise market, including branch offices, campus locations, and data centers. The switches run the Juniper Networks Junos operating system (Junos OS), which provides Layer 2 and Layer 3 switching, routing, and security services.
6. The EX switches are secure network devices that protect themselves largely by offering only a minimal logical interface to the network and attached nodes. Each of the EX switches includes an ASIC-based Packet Forwarding Engine (PFE) with an integrated CPU to consistently deliver wire-rate forwarding.
7. The EX2300, EX2300-C and EX3400 each occupy a single rack unit, delivering a compact solution.
8. The EX Switches primarily support the definition of, and enforce, information flow policies among network nodes. All information flow from one network node to another passes through an instance of the TOE. Information flow is controlled on the basis of network node addresses and protocol. In support of the information flow security functions, the TOE ensures that security-relevant activity is audited, and provides the security tools to manage all of the security functions.

1.6 TOE Description

1.6.1 Overview

9. The appliances are physically self-contained, housing the firmware and hardware necessary to perform all switching and routing functions. The architecture components of the appliances are:
 - Switch fabric – the switch fabric boards/modules provide a highly scalable, non-blocking, centralized switch fabric matrix through which all network data passes.
 - Routing Engine (Control Board) – the RE runs the Junos firmware and provides Layer 3 routing services and Layer 2 switching services. The RE also provides network management for all operations necessary for the configuration and operation of the TOE and controls the flow of information through the TOE, including support for appliance interface control and control plane functions such as chassis component, system management and user access to the appliance.
 - Layer 2 switching services, Layer 3 switching/routing services and network management for all operations necessary for the configuration and operation of the TOE and controls the flow of information through the TOE.

- The Packet Forwarding Engine (PFE) – provides all operations necessary for transit packet forwarding:
 - The EX2300 switch has four 10-Gigabit Ethernet ports and up to 48 10/100/1000 BASE-T Gigabit Ethernet connectors with or without PoE/PoE+.
 - The EX2300-C switch has two 10-Gigabit Ethernet ports and 12 10/100/1000 BASE-T Gigabit Ethernet connectors with or without PoE/PoE+.
 - The EX3400 switch has four dual-mode (GbE/10GbE) small form-factor pluggable transceiver (SFP/SFP+) uplink ports and two 40GbE QSFP+ ports, and up to 48 10/100/1000 BASE-T Gigabit Ethernet connectors with or without PoE/PoE+.
 - Power – power supply bays to provide complete flexibility for provisioning and redundancy. The power supplies connect to the midplane, which distributes the different output voltages produced by the power supplies to the appliance components, depending on their voltage requirements.
10. The Routing Engine and Packet Forwarding Engine perform their primary tasks independently, while constantly communicating through a high-speed internal link. This arrangement provides streamlined forwarding and routing control and the capability to run Internet-scale networks at high speeds.
 11. The functions of the appliances can all be managed through the Junos firmware, either from a connected terminal console or via a network connection. Network management is secured using the SSH protocol. All management, whether from a user connecting to a terminal or from the network, requires successful authentication. In the evaluated deployment the TOE is managed and configured via Command Line Interface, either via a directly connected console or over the network secured using the SSH protocol.

1.6.2 Physical boundary

12. The TOE is the Junos OS 19.1R2 firmware running on the appliance chassis listed in Table 2. Hence, the **physical boundary of the TOE is the entire chassis of the appliance**, as shown in Figure 1 and defined in Table 2 below.

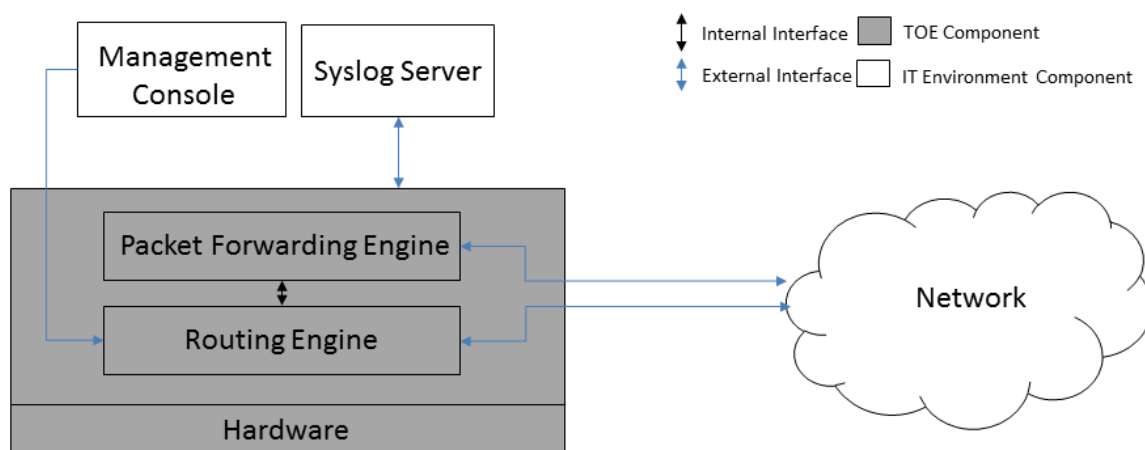


Figure 1 TOE Boundary

13. The TOE interfaces are comprised of the following:
 - i. Network interfaces which pass traffic
 - ii. Management interface through which handle administrative actions.

Chassis Model	Processor	Hardware Version	Network Ports	Firmware (Operating System)
EX2300	1.25Ghz ARM Cortex A9	EX2300-48P/48T	48 x 10/100/1000 BASE-T Gigabit Ethernet connectors with/out PoE/PoE+ 4 x 10-Gigabit Ethernet connectors (SFP/SFP+)	Junos OS 19.1R2
		EX2300-C-12T/12T	12 x 10/100/1000 BASE-T Gigabit Ethernet connectors with/out PoE/PoE+ 2 x 10-Gigabit Ethernet connectors	
EX3400	Dual Core 1Ghz ARM Cortex A9	EX3400-24P/24T	Up to 48 x 10/100/1000 BASE-T Gigabit Ethernet connectors with/out PoE/PoE+ 4 x SFP/SFP+ 2 x QSFP/QSFP+	
		EX3400-48P/48T		

Table 2 TOE Chassis Details

14. The details of the appliances, including interface options supported for the EX2300, EX2300-C and EX3400 appliances are described in the following reference documents:
 - [EX2300 Switch Hardware Guide](#)
 - [EX3400 Switch Hardware Guide](#)
15. The same jinstall image is used for each of the above listed Ethernet switch chassis, namely:
 - junos-arm-32-19.1R2.5.tgz
16. The firmware version reflects the detail reported for the components of the Junos OS when the “show version” command is executed on the appliance.
17. The guidance documents included as part of the TOE are:

[ECG] Junos OS Common Criteria Evaluated Configuration Guide for EX2300 and EX3400 Devices, Release 19.1R2

1.6.3 Logical Scope of the TOE

18. The logical boundary of the TOE includes the following security functionality:

Security Functionality	Description
Security Audit	Junos auditable events are stored in the syslog files on the appliance and can be sent to an external log server (via Netconf over SSH). Auditable events include start-up and shutdown of the audit functions, authentication events, as well as the events listed in Table 9. Audit records include the date and time, event category, event type, username, and the outcome of the event (success or failure). Local syslog storage limits are configurable and are monitored. In the event of storage limits being reached the oldest logs will be overwritten.

Security Functionality	Description
Cryptographic Support	<p>The TOE provides an SSH server to support protected communications for administrators to establish secure sessions and to connect to external syslog servers. The TOE requires that applications exchanging information with it are successfully authenticated prior to any exchange (i.e. applications connecting over SSH).</p> <p>The TOE includes cryptographic modules that provide the underlying cryptographic services, including key management and protection of stored keys, algorithms, random bit generation and crypto-administration. The cryptographic modules provide confidentiality and integrity services for authentication and for protecting communications with connecting applications.</p>
Identification and Authentication	<p>The TOE supports Role Based Access Control. All users must be authenticated to the TOE prior to carrying out any management actions. The TOE supports password-based authentication and public key-based authentication. Based on the assigned role, a user is granted a set of privileges to access the system.</p> <p>Administrative users must provide unique identification and authentication data before any administrative access to the system is granted. Authentication data entered and stored on the TOE is protected. The TOE can be configured to terminate interactive user sessions and to present an access banner with warning messages prior to authentication.</p>
Security Management	<p>The TOE provides a Security Administrator role that is responsible for:</p> <ul style="list-style-type: none"> • the configuration and maintenance of cryptographic elements related to the establishment of secure connections to and from the evaluated product • the regular review of all audit data; • initiation of trusted update function; • all administrative tasks (e.g., creating the security policy). <p>The devices are managed through a Command Line Interface (CLI). The CLI is accessible through local (serial) console connection or remote administrative (SSH) session.</p>
Protection of the TSF	<p>The TOE protects all passwords, pre-shared keys, symmetric keys and private keys from unauthorized disclosure. Passwords are stored using sha256 or sha512. The TOE executes self-tests during initial start-up to ensure correct operation and enforcement of its security functions. An administrator can install software updates to the TOE. The TOE internally maintains the date and time.</p>

Security Functionality	Description
TOE Access	Prior to establishing an administration session with the TOE, a banner is displayed to the user. The banner messaging is customizable. The TOE will terminate an interactive session after a period of inactivity. A user can terminate their local CLI session and remote CLI session by entering exit at the prompt.
Trusted Path/Trusted Channel	The TOE supports SSH v2 for secure communication to Syslog server. The TOE supports SSH v2 (remote CLI) for secure remote administration.

Table 3 Logical Scope of TOE

1.6.4 Non-TOE hardware/software/firmware

19. The TOE relies on the provision of the following items in the network environment:

- Syslog server supporting SSHv2 connections to send audit logs;
- SSHv2 client for remote administration;
- Serial connection client for local administration.

1.6.5 Summary of out scope items

- Use of telnet, since it violates the Trusted Path requirement set (see Section 5.7.2)
- Use of FTP, since it violates the Trusted Path requirement set (see Section 5.7.2)
- Use of SNMP, since it violates the Trusted Path requirement set (see Section 5.7.2)
- Use of SSL, including management via J-Web, JUNOScript and JUNOScope, since it violates the Trusted Path requirement set (see Section 5.7.2).
- Use of digital signatures to verify updates

2 Conformance Claim

2.1 CC Conformance Claim

20. The TOE and ST are compliant with the Common Criteria (CC) Version 3.1, Revision 5, dated: April 2017.

This TOE is conformant to:

- Common Criteria for Information Technology Security Evaluations Part 1, Version 3.1, Revision 5, April 2017
- Common Criteria for Information Technology Security Evaluations Part 2, Version 3.1, Revision 5, April 2017: Part 2 extended
- Common Criteria for Information Technology Security Evaluations Part 2, Version 3.1, Revision 5, April 2017: Part 3 conformant

2.2 PP Conformance claim

21. This TOE is conformant to:

- [NDcPP2.1] Collaborative Protection Profile for Network Devices (NDcPP), Version 2.1, 24-September-2018

2.3 Conformance Rationale

22. This Security Target provides exact conformance to Version 2.1 of the Collaborative Protection Profile for Network Devices. The security problem definition, security objectives and security requirements in this Security Target are all taken from the Protection Profile performing only operations defined there.

2.4 Technical Decisions

23. In line with Labgram #105, this section identifies all NIAP Technical Decisions that are applicable to this TOE:

NIAP Technical Decisions (TDs)		
Technical Decisions applicable to NDcPP v2.1		
Technical Decisions	Applicable	Exclusion Rationale (if applicable)
TD0395: NIT Technical Decision for Different Handling of TLS1.1 and TLS1.2	No	No TLS claims made in the ST
TD0396: NIT Technical Decision for FCS_TLSC_EXT.1.1, Test 2	No	No TLS claims made in the ST
TD0397: NIT Technical Decision for Fixing AES-CTR Mode Tests	Yes	
TD0398: NIT Technical Decision for FCS_SSH*EXT.1.1 RFCs for AES-CTR	Yes	
TD0399: NIT Technical Decision for Manual installation of CRL (FIA_X509_EXT.2)	Yes	
TD0400: NIT Technical Decision for FCS_CKM.2 and elliptic curve-based key establishment	Yes	

TD0401: NIT Technical Decision for Reliance on external servers to meet SFRs	Yes	(However, the TOE itself meets all FIA requirements)
TD0402: NIT Technical Decision for RSA-based FCS_CKM.2 Selection	Yes	(However, NIST SP800-56B is not claimed)
TD0407 – NIT Technical Decision for handling Certification of Cloud Deployments	No	Not a cloud deployment
TD0408 – NIT Technical Decision for local vs. remote administrator accounts	Yes	
TD0409 – NIT decision for Applicability of FIA_AFL.1 to key-based SSH authentication	Yes	
TD0410 – NIT technical decision for Redundant assurance activities associated with FAU_GEN.1	Yes	
TD0411 - NIT Technical Decision for FCS_SSHC_EXT.1.5, Test 1 - Server and client side seem to be confused	No	No SSH client claims made in ST
TD0412 – NIT Technical Decision for FCS_SSHS_EXT.1.5 SFR and AA discrepancy	Yes	
TD0423 – NIT Technical Decision for Clarification about application of Rfl#201726rev2	No	No TLS or X.509 claims made in ST
TD0424 – NIT Technical Decision for NDcPP v2.1 Clarification - FCS_SSHC/S_EXT1.5	Yes	
TD0425 – NIT Technical Decision for Cut-and-paste Error for Guidance AA	Yes	
TD0447 - NIT Technical Decision for Using 'diffie-hellman-group-exchange-sha256' in FCS_SSHC/S_EXT.1.7	Yes	
TD0450 - NIT Technical Decision for RSA-based ciphers and the Server Key Exchange message	No	No TLS claims made in ST
TD0451 - NIT Technical Decision for ITT Comm UUID Reference Identifier	No	No TLS claims made in ST
TD0453 - NIT Technical Decision for Clarify authentication methods SSH clients can use to authenticate SSH se	No	SSHC is not claimed in ST
TD0475 – NIT Technical Decision for Separate traffic consideration for SSH rekey	Yes	
TD0477 - NIT Technical Decision for Clarifying FPT_TUD_EXT.1 Trusted Update	Yes	

TD0478 - NIT Technical Decision for Application Notes for FIA_X509_EXT.1 iterations	No	X.509 is not claimed in ST
TD0480 - NIT Technical Decision for Granularity of audit events	Yes	
TD0481 - NIT Technical Decision for FCS_(D)TLSC_EXT.X.2 IP addresses in reference identifiers	No	TLS is not claimed in ST
TD0482 - NIT Technical Decision for Identification of usage of cryptographic schemes	Yes	
TD0483 – NIT Technical Decision for Applicability of FPT_APW_EXT.1	Yes	
TD0484 – NIT Technical Decision for Interactive Sessions in FTA_SSL_EXT.1 & FTA_SSL.3	Yes	

Table 4 Technical Decisions

3 Security Problem Definition

24. The security problem definition has been taken from [NDcPP2.1] and is reproduced here for the convenience of the reader.
25. The threats for the Network Device are grouped according to functional areas of the device in the sections below.

3.1 Threats

Threat	Threat Definition
T.UNAUTHORIZED_ADMINISTRATOR_ACCESS	Threat agents may attempt to gain Administrator access to the network device by nefarious means such as masquerading as an Administrator to the device, masquerading as the device to an Administrator, replaying an administrative session (in its entirety, or selected portions), or performing man-in-the-middle attacks, which would provide access to the administrative session, or sessions between network devices. Successfully gaining Administrator access allows malicious actions that compromise the security functionality of the device and the network on which it resides.
T.WEAK_CRYPTOGRAPHY	Threat agents may exploit weak cryptographic algorithms or perform a cryptographic exhaust against the key space. Poorly chosen encryption algorithms, modes, and key sizes will allow attackers to compromise the algorithms, or brute force exhaust the key space and give them unauthorized access allowing them to read, manipulate and/or control the traffic with minimal effort.
T.UNTRUSTED_COMMUNICATION_CHANNELS	Threat agents may attempt to target network devices that do not use standardized secure tunneling protocols to protect the critical network traffic. Attackers may take advantage of poorly designed protocols or poor key management to successfully perform man-in-the-middle attacks, replay attacks, etc. Successful attacks will result in loss of confidentiality and integrity of the critical network traffic, and potentially could lead to a compromise of the network device itself.

Threat	Threat Definition
T.WEAK_AUTHENTICATION_ENDPOINTS	Threat agents may take advantage of secure protocols that use weak methods to authenticate the endpoints – e.g., shared password that is guessable or transported as plaintext. The consequences are the same as a poorly designed protocol, the attacker could masquerade as the Administrator or another device, and the attacker could insert themselves into the network stream and perform a man-in-the-middle attack. The result is the critical network traffic is exposed and there could be a loss of confidentiality and integrity, and potentially the network device itself could be compromised.
T.UPDATE_COMPROMISE	Threat agents may attempt to provide a compromised update of the software or firmware which undermines the security functionality of the device. Non-validated updates or updates validated using non-secure or weak cryptography leave the update firmware vulnerable to surreptitious alteration.
T.UNDETECTED_ACTIVITY	Threat agents may attempt to access, change, and/or modify the security functionality of the network device without Administrator awareness. This could result in the attacker finding an avenue (e.g., misconfiguration, flaw in the product) to compromise the device and the Administrator would have no knowledge that the device has been compromised.
T.SECURITY_FUNCTIONALITY_COMPROMISE	Threat agents may compromise credentials and device data enabling continued access to the network device and its critical data. The compromise of credentials include replacing existing credentials with an attacker's credentials, modifying existing credentials, or obtaining the administrator or device credentials for use by the attacker.
T.PASSWORD_CRACKING	Threat agents may be able to take advantage of weak administrative passwords to gain privileged access to the device. Having privileged access to the device provides the attacker unfettered access to the network traffic, and may allow them to take advantage of any trust relationships with other network devices.
T.SECURITY_FUNCTIONALITY_FAILURE	An external, unauthorized entity could make use of failed or compromised security functionality and might therefore subsequently use or abuse security functions without prior authentication to access, change or modify device data, critical network traffic or security functionality of the device.

Table 5 Threats

3.2 Assumptions

26. This section describes the assumptions made in identification of the threats and security requirements for network devices. The network device is not expected to provide assurance in any of these areas, and as a result, requirements are not included to mitigate the threats associated.

Assumption	Assumption Definition
A.PHYSICAL_PROTECTION	The network device is assumed to be physically protected in its operational environment and not subject to physical attacks that compromise the security and/or interfere with the device's physical interconnections and correct operation. This protection is assumed to be sufficient to protect the device and the data it contains. As a result, the cPP will not include any requirements on physical tamper protection or other physical attack mitigations. The cPP will not expect the product to defend against physical access to the device that allows unauthorized entities to extract data, bypass other controls, or otherwise manipulate the device.
A.LIMITED_FUNCTIONALITY	The device is assumed to provide networking functionality as its core function and not provide functionality/services that could be deemed as general purpose computing. For example the device should not provide computing platform for general purpose applications (unrelated to networking functionality).
A.NO_THRU_TRAFFIC_PROTECTION	A standard/generic network device does not provide any assurance regarding the protection of traffic that traverses it. The intent is for the network device to protect data that originates on or is destined to the device itself, to include administrative data and audit data. Traffic that is traversing the network device, destined for another network entity, is not covered by the ND cPP. It is assumed that this protection will be covered by cPPs and PP-Modules for particular types of network devices (e.g., firewall).
A.TRUSTED_ADMINISTRATOR	The Security Administrator(s) for the network device are assumed to be trusted and to act in the best interest of security for the organization. This includes being appropriately trained, following policy, and adhering to guidance documentation. Administrators are trusted to ensure passwords/credentials have sufficient strength and entropy and to lack malicious intent when administering the device. The network device is not expected to be capable of defending against a malicious Administrator that actively works to bypass or compromise the security of the device. For TOEs supporting X.509v3 certificate-based authentication, the Security Administrator(s) are expected to fully validate (e.g. offline verification) any CA certificate (root CA certificate or intermediate CA certificate) loaded into the TOE's trust store (aka 'root store', 'trusted CA Key Store', or similar) as a trust anchor prior to use (e.g. offline verification).

Assumption	Assumption Definition
A.REGULAR_UPDATES	The network device firmware and software is assumed to be updated by an Administrator on a regular basis in response to the release of product updates due to known vulnerabilities.
A.ADMIN_CREDENTIALS_SECURE	The administrator's credentials (private key) used to access the network device are protected by the platform on which they reside.
A.RESIDUAL_INFORMATION	The Administrator must ensure that there is no unauthorized access possible for sensitive residual information (e.g. cryptographic keys, keying material, PINs, passwords etc.) on networking equipment when the equipment is discarded or removed from its operational environment.

Table 6 Assumptions

3.3 Organizational Security Policies

27. An organizational security policy is a set of rules, practices, and procedures imposed by an organization to address its security needs. For the purposes of this cPP a single policy is described in the section below.

Policy Name	Policy Definition
P.ACCESS_BANNER	The TOE shall display an initial banner describing restrictions of use, legal agreements, or any other appropriate information to which users consent by accessing the TOE.

Table 7 Organizational Security Policies

4 Security Objectives

28. The security objectives have been taken from [NDcPP2.1] and are reproduced here for the convenience of the reader.

4.1 Security Objectives for the TOE

29. The security objectives for the TOE are trivially determined through the inverse of the statement of threats presented in [NDcPP2.1] Section 4.1.

4.2 Security Objectives for the Operational Environment

30. The security objectives have been taken from [NDcPP2.1] and are reproduced here for the convenience of the reader. The following section describe objectives for the Operational Environment:

Environment Security Objective	IT Environment Security Objective Definition
OE.PHYSICAL	Physical security, commensurate with the value of the TOE and the data it contains, is provided by the environment.
OE.NO_GENERAL_PURPOSE	There are no general-purpose computing capabilities (e.g., compilers or user applications) available on the TOE, other than those services necessary for the operation, administration and support of the TOE.
OE.NO_THRU_TRAFFIC_PROTECTION	The TOE does not provide any protection of traffic that traverses it. It is assumed that protection of this traffic will be covered by other security and assurance measures in the operational environment.
OE.TRUSTED_ADMIN	Security Administrators are trusted to follow and apply all administrator guidance in a trusted manner. For TOEs supporting X.509v3 certificate-based authentication, the Security Administrator(s) are assumed to monitor the revocation status of all certificates in the TOE's trust store and to remove any certificate from the TOE's trust store in case such certificate can no longer be trusted.
OE.UPDATES	The TOE firmware and software is updated by an Administrator on a regular basis in response to the release of product updates due to known vulnerabilities.
OE.ADMIN_CREDENTIALS_SECURE	The Administrator's credentials (private key) used to access the TOE must be protected on any other platform on which they reside.
OE.RESIDUAL_INFORMATION	The Security Administrator ensures that there is no unauthorized access possible for sensitive residual information (e.g. cryptographic keys, keying material, PINs, passwords etc.) on networking equipment when the equipment is discarded or removed from its operational environment.

Table 8 Security Objectives for Operational Environment

4.3 Security Objectives rationale

31. As these objectives for the TOE and operational environment are the same as those specified in [NDcPP2.1], the rationales provided in the prose of the following are wholly applicable to this security target as the statements of threats, assumptions, OSPs and security objectives provided in this security target are the same as those defined in the collaborative Protection Profile to which this ST claims conformance:
- [NDcPP2.1] section 4

5 Security Functional Requirements

32. All security functional requirements are taken from the [NDcPP2.1]. The Security Functional requirements are primarily structured according to [NDcPP2.1]. The SFRs are presented in accordance with the conventions described in [NDcPP2.1] Section 6.1, and section 1.4 of this document.
33. Note: as this TOE is not distributed, none of the security functional requirements relating to distributed TOEs are specified for this TOE.

5.1 Security Audit (FAU)

5.1.1 Security Audit Data generation (FAU_GEN)

5.1.1.1 FAU_GEN.1 Audit data generation

FAU_GEN.1 Audit Data Generation

FAU_GEN.1.1 The TSF shall be able to generate an audit record of the following auditable events:

- a) Start-up and shut-down of the audit functions;
- b) All auditable events for the not specified level of audit; and
- c) *All administrative actions comprising:*
 - *Administrative login and logout (name of user account shall be logged if individual user accounts are required for Administrators).*
 - *Changes to TSF data related to configuration changes (in addition to the information that a change occurred it shall be logged what has been changed).*
 - *Generating/import of, changing, or deleting of cryptographic keys (in addition to the action itself a unique key name or key reference shall be logged).*
 - *Resetting passwords (name of related user account shall be logged).*
 - *[starting and stopping services, changes to configuration of audit behavior, changes to thresholds for SSH re-keying¹];*
- d) *Specifically defined auditable events listed in Table 9.*

FAU_GEN.1.2 The TSF shall record within each audit record at least the following information:

- a) Date and time of the event, type of event, subject identity, and the outcome (success or failure) of the event; and
- b) For each audit event type, based on the auditable event definitions of the functional components included in the cPP/ST, *information specified in column three of Table 9.*

Requirement	Auditable Events	Additional Audit Record Contents
FAU_GEN.1	None.	None.
FAU_GEN.2	None.	None.
FAU_STG_EXT.1	None.	None.
FAU_STG.1	None.	None.
FCS_CKM.1	None.	None.
FCS_CKM.2	None.	None.
FCS_CKM.4	None.	None.
FCS_COP.1/DataEncryption	None.	None.

¹ FMT_SMF.1 also includes management functions for management of cryptographic keys and set the time used for time stamp. However, audit of these activities these actions is addressed in the 3rd bullet of item c in FAU_GEN.1.1 and in the FPT_STM_EXT.1 entry in Table 9, respectively.

FCS_COP.1/SigGen	None.	None.
FCS_COP.1/Hash	None.	None.
FCS_COP.1/KeyedHash	None.	None.
FCS_RBG_EXT.1	None.	None.
FIA_AFL.1	Unsuccessful login attempts limit is met or exceeded.	Origin of the attempt (e.g., IP address).
FIA_PMG_EXT.1	None.	None.
FIA_UIA_EXT.1	All use of identification and authentication mechanism.	Origin of the attempt (e.g., IP address)
FIA_UAU_EXT.2	All use of identification and authentication mechanism.	Origin of the attempt (e.g., IP address)
FIA_UAU.7	None.	None.
FMT_MOF.1/ManualUpdate	Any attempt to initiate a manual update	None.
FMT_MTD.1/CoreData	None.	None.
FMT_SMF.1	All management activities of TSF data	None.
FMT_SMR.2	None.	None.
FPT_SKP_EXT.1	None.	None.
FPT_APW_EXT.1	None.	None.
FPT_TST_EXT.1	None.	None.
FPT_TUD_EXT.1	Initiation of update; result of the update attempt (success or failure)	None.
FPT_STM_EXT.1	Discontinuous changes to time - either Administrator actuated or changed via an automated process. (Note that no continuous changes to time need to be logged. See also application note on FPT_STM_EXT.1)	For discontinuous changes to time: The old and new values for the time. Origin of the attempt to change time for success and failure (e.g., IP address).
FTA_SSL_EXT.1 (if "terminate the session is selected)	The termination of a local interactive session by the session locking mechanism.	None.
FTA_SSL.3	The termination of a remote session by the session locking mechanism.	None.
FTA_SSL.4	The termination of an interactive session.	None.
FTA_TAB.1	None.	None.
FTP_ITC.1	Initiation of the trusted channel. Termination of the trusted channel. Failure of the trusted channel functions.	Identification of the initiator and target of failed trusted channels establishment attempt.
FTP_TRP.1/Admin	Initiation of the trusted path. Termination of the trusted path.	None.

	Failure of the trusted path functions.	
FCS_SSHS_EXT.1	Failure to establish an SSH session	Reason for failure
FMT_MOF.1/Functions	None.	None.
FMT_MOF.1/Services	None.	None.
FMT_MTD.1/CryptoKeys	None.	None.

Table 9 FAU_GEN.1 Security Functional Requirements and Auditable Events

5.1.1.2 FAU_GEN.2 User identity association

FAU_GEN.2 User identity association

FAU_GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

5.1.2 Security audit event storage (Extended - FAU_STG_EXT)

5.1.2.1 FAU_STG_EXT.1 Protected Audit Event Storage

FAU_STG_EXT.1 Protected Audit Event Storage

FAU_STG_EXT.1.1 The TSF shall be able to transmit the generated audit data to an external IT entity using a trusted channel according to FTP_ITC.1.

ST Application Note

Transfer of the audit data to the external server is performed automatically (without further Security Administrator intervention) in the evaluated deployment.

FAU_STG_EXT.1.2 The TSF shall be able to store generated audit data on the TOE itself.

[TOE shall consist of a single standalone component that stores audit data locally].

FAU_STG_EXT.1.3 The TSF shall [overwrite previous audit records according to the following rule: *[oldest log is overwritten]*] when the local storage space for audit data is full.

5.1.2.2 FAU_STG.1 Protected audit trail storage (Optional)

FAU_STG.1 Protected audit trail storage

FAU_STG.1.1 The TSF shall protect the stored audit records in the audit trail from unauthorised deletion.

FAU_STG.1.2 The TSF shall be able to prevent unauthorised modifications to the stored audit records in the audit trail.

5.2 Cryptographic Support (FCS)

5.2.1 Cryptographic Key Management (FCS_CKM)

5.2.1.1 FCS_CKM.1 Cryptographic Key Generation (Refinement)

FCS_CKM.1 Cryptographic Key Generation

FCS_CKM.1.1 The TSF shall generate **asymmetric** cryptographic keys in accordance with a specified cryptographic key generation algorithm: [

- RSA schemes using cryptographic key sizes of 2048-bit or greater that meet the following: FIPS PUB 186-4, "Digital Signature Standard (DSS)", Appendix B.3;

- ECC schemes using “NIST curves” [P-256, P-384, P-521] that meet the following: FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Appendix B.4
- FFC Schemes using Diffie-Hellman group 14 that meet the following: RFC 3526, Section 3
]and specified cryptographic key sizes [assignment: *cryptographic key sizes*] that meet the following: [assignment: *list of standards*].

5.2.1.2 FCS_CKM.2 Cryptographic Key Establishment (Refinement)

FCS_CKM.2 Cryptographic Key Establishment

FCS_CKM.2.1 The TSF shall **perform** cryptographic **key establishment** in accordance with a specified cryptographic key **establishment** method: [

- Elliptic curve-based key establishment schemes that meet the following: NIST Special Publication 800-56A Revision 2, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography”;
- Key establishment scheme using Diffie-Hellman group 14 that meets the following: RFC 3526, Section 3;

]that meets the following: [assignment: *list of standards*].

5.2.1.3 FCS_CKM.4 Cryptographic Key Destruction

FCS_CKM.4 Cryptographic Key Destruction

FCS_CKM.4.1 The TSF shall destroy cryptographic keys in accordance with a specified cryptographic key destruction method

- For plaintext keys in volatile storage, the destruction shall be executed by a [destruction of reference to the key directly followed by a request for garbage collection];
- For plaintext keys in non-volatile storage, the destruction shall be executed by the invocation of an interface provided by a part of the TSF that [
 - logically addresses the storage location of the key and performs a [single overwrite consisting of [zeroes]]

that meets the following: *No Standard*.

5.2.2 Cryptographic Operation (FCS_COP)

5.2.2.1 FCS_COP.1 Cryptographic Operation

FCS_COP.1/DataEncryption Cryptographic Operation (AES Data Encryption/Decryption)

FCS_COP.1.1/DataEncryption The TSF shall perform *encryption/decryption* in accordance with a specified cryptographic algorithm *AES used in [CBC, CTR] mode* and cryptographic key sizes [*128 bits, 256 bits*] that meet the following: *AES as specified in ISO 18033-3, [CBC as specified in ISO 10116, CTR as specified in ISO 10116]*.

FCS_COP.1/SigGen Cryptographic Operation (Signature Generation and Verification)

FCS_COP.1.1/SigGen The TSF shall perform *cryptographic signature services (generation and verification)* in accordance with a specified cryptographic algorithm [

- RSA Digital Signature Algorithm and cryptographic key sizes (modulus) [2048 bits, 4096 bits],
- Elliptic Curve Digital Signature Algorithm and cryptographic key sizes [P-256, P-384, P-521 bits]

]and cryptographic key sizes [assignment: *cryptographic key sizes*]

that meet the following: [

- *For RSA schemes: FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Section 5.5, using PKCS #1 v2.1 Signature Schemes RSASSA-PSS and/or RSASSA-PKCS1v1_5; ISO/IEC 9796-2, Digital signature scheme 2 or Digital Signature scheme 3,*
- *For ECDSA schemes: FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Section 6 and Appendix D, Implementing “NIST curves” [P-256, P-384, P-521]; ISO/IEC 14888-3, Section 6.4*

].

FCS_COP.1/Hash Cryptographic Operation (Hash Algorithm)

FCS_COP.1.1/Hash The TSF shall perform *cryptographic hashing services* in accordance with a specified cryptographic algorithm [*SHA-1, SHA-256, SHA-384, SHA-512*] and ~~cryptographic key sizes~~ [~~assignment: cryptographic key sizes~~] and **message digest sizes [160, 256, 384, 512] bits** that meet the following: *ISO/IEC 10118-3:2004.*

FCS_COP.1/KeyedHash Cryptographic Operation (Keyed Hash Algorithm)

FCS_COP.1.1/KeyedHash The TSF shall perform *keyed-hash message authentication* in accordance with a specified cryptographic algorithm [*HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-512*] and cryptographic key sizes [*160, 256 and 512 bits*] and **message digest sizes [160, 256, 512] bits** that meet the following: *ISO/IEC 9797-2:2011, Section 7 “MAC Algorithm 2”.*

5.2.3 FCS_RBG_EXT.1 Random Bit Generation

FCS_RBG_EXT.1 Random Bit Generation

FCS_RBG_EXT.1.1 The TSF shall perform all deterministic random bit generation services in accordance with ISO/IEC 18031:2011 using [*HMAC_DRBG (any)*].

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by at least one entropy source that accumulates entropy from [*[3] software-based noise source, [1] hardware-based noise source*] with a minimum of [*256 bits*] of entropy at least equal to the greatest security strength, according to ISO/IEC 18031:2011 Table C.1 “Security Strength Table for Hash Functions”, of the keys and hashes that it will generate.

5.2.4 Cryptographic Protocols (Extended – FCS_SSHS_EXT SSH Protocol)

5.2.4.1 FCS_SSHS_EXT.1 SSH Server Protocol

FCS_SSHS_EXT.1 SSH Server Protocol

FCS_SSHS_EXT.1.1 The TSF shall implement the SSH protocol that complies with RFC(s) [*4251, 4252, 4253, 4254, 4344, 5656, 6668*].

FCS_SSHS_EXT.1.2 The TSF shall ensure that the SSH protocol implementation supports the following authentication methods as described in RFC 4252: public key-based, [*password-based*].

FCS_SSHS_EXT.1.3 The TSF shall ensure that, as described in RFC 4253, packets greater than [*256K*] bytes in an SSH transport connection are dropped.

FCS_SSHS_EXT.1.4 The TSF shall ensure that the SSH transport implementation uses the following encryption algorithms and rejects all other encryption algorithms: [*aes128-cbc, aes256-cbc, aes128-ctr, aes256-ctr*].

FCS_SSHS_EXT.1.5 The TSF shall ensure that the SSH public-key based authentication implementation uses [*ssh-rsa, rsa-sha2-256, rsa-sha2-512, ecdsa-sha2-nistp256, ecdsa-sha2-*

nistp384, ecdsa-sha2-nistp521] as its public key algorithm(s) and rejects all other public key algorithms.

FCS_SSHS_EXT.1.6 The TSF shall ensure that the SSH transport implementation uses [*hmac-sha1, hmac-sha2-256, hmac-sha2-512*] as its MAC algorithm(s) and rejects all other MAC algorithm(s).

FCS_SSHS_EXT.1.7 The TSF shall ensure that [*diffie-hellman-group14-sha1, ecdh-sha2-nistp256*] and [*ecdh-sha2-nistp384, ecdh-sha2-nistp521*] are the only allowed key exchange methods used for the SSH protocol.

FCS_SSHS_EXT.1.8 The TSF shall ensure that within SSH connections, the same session keys are used for a threshold of no longer than one hour, and each encryption key is used to protect no more than one gigabyte of data. After any of the thresholds are reached a rekey needs to be performed.

ST Application Note

FCS_SSHS_EXT.1 was updated based on TD0408 and TD0424.

5.3 Identification and Authentication (FIA)

5.3.1 Authentication Failure Management (FIA_AFL)

5.3.1.1 FIA_AFL.1 Authentication Failure Management (Refinement)

FIA_AFL.1 Authentication Failure Management

FIA_AFL.1.1 The TSF shall detect when an Administrator configurable positive integer within [2 to 10] unsuccessful authentication attempts occur related to *Administrators attempting to authenticate remotely using a password*.

FIA_AFL.1.2 When the defined number of unsuccessful authentication attempts has been met, the TSF shall [

- *prevent the offending remote Administrator from successfully establishing remote session using any authentication method that involves a password until an Administrator defined time period has elapsed*].

FIA_AFL.1 has been updated according to TD0408.

5.3.2 Password Management (Extended – FIA_PMG_EXT)

5.3.2.1 FIA_PMG_EXT.1 Password Management

FIA_PMG_EXT.1 Password Management

FIA_PMG_EXT.1.1 The TSF shall provide the following password management capabilities for administrative passwords:

- Passwords shall be able to be composed of any combination of upper and lower case letters, numbers, and the following special characters: [*“!” , “@” , “#” , “\$” , “%” , “^” , “&” , “*” , “(” , “)”*]; *[and all other standard ASCII, extended ASCII and Unicode characters]*];
- Minimum password length shall be configurable to between [10] and [20] characters.

5.3.3 User Identification and Authentication (Extended – FIA_UIA_EXT)

5.3.3.1 FIA_UIA_EXT.1 User Identification and Authentication

FIA_UIA_EXT.1 User Identification and Authentication

FIA_UIA_EXT.1.1 The TSF shall allow the following actions prior to requiring the non-TOE entity to initiate the identification and authentication process:

- Display the warning banner in accordance with FTA_TAB.1;
- *[[ICMP echo]]*.

FIA_UIA_EXT.1.2 The TSF shall require each administrative user to be successfully identified and authenticated before allowing any other TSF-mediated actions on behalf of that administrative user.

5.3.4 User authentication (FIA_UAU) (Extended – FIA_UAU_EXT)

5.3.4.1 FIA_UAU_EXT.2 Password-based Authentication Mechanism

FIA_UAU_EXT.2 Password-based Authentication Mechanism

FIA_UAU_EXT.2.1 The TSF shall provide a local *[[password-based]]* authentication mechanism to perform local administrative user authentication.

ST Application Note

FIA_UAU_EXT.2 has been updated according to TD0408

5.3.4.2 FIA_UAU.7 Protected Authentication Feedback

FIA_UAU.7 Protected Authentication Feedback

FIA_UAU.7.1 The TSF shall provide only *obscured feedback* to the administrative user while the authentication is in progress **at the local console**.

5.4 Security Management (FMT)

5.4.1 Management of functions in TSF (FMT_MOF)

5.4.1.1 FMT_MOF.1/ManualUpdate Management of security functions behaviour

FMT_MOF.1/ManualUpdate Management of security functions behaviour

FMT_MOF.1.1/ManualUpdate The TSF shall restrict the ability to enable the functions to *perform manual updates to Security Administrators*.

5.4.1.2 FMT_MOF.1/Services Management of security functions behaviour

FMT_MOF.1/Services Management of security functions behaviour

FMT_MOF.1.1/Services The TSF shall restrict the ability to enable and disable start and stop the ~~functions~~ **services** to *Security Administrators*.

5.4.1.3 FMT_MOF.1/Functions Management of security functions behaviour

FMT_MOF.1/Functions Management of security functions behaviour

FMT_MOF.1.1/Functions The TSF shall restrict the ability to modify the behaviour of the functions *[[transmission of audit data to an external IT entity, handling of audit data]]* to *Security Administrators*.

5.4.2 Management of TSF Data (FMT_MTD)

5.4.2.1 FMT_MTD.1/CoreData Management of TSF Data

FMT_MTD.1/CoreData Management of TSF Data

FMT_MTD.1.1/CoreData The TSF shall restrict the ability to manage the *TSF data* to *Security Administrators*.

5.4.2.2 *FMT_MTD.1/CryptoKeys Management of TSF data*

FMT_MTD.1/CryptoKeys Management of TSF data

FMT_MTD.1.1/CryptoKeys The TSF shall restrict the ability to manage the *cryptographic keys* to *Security Administrators*.

5.4.3 Specification of Management Functions (FMT_SMF)

5.4.3.1 *FMT_SMF.1 Specification of Management Functions*

FMT_SMF.1 Specification of Management Functions

FMT_SMF.1.1 The TSF shall be capable of performing the following management functions:

- *Ability to administer the TOE locally and remotely;*
 - *Ability to configure the access banner;*
 - *Ability to configure the session inactivity time before session termination or locking;*
 - *Ability to update the TOE, and to verify the updates using [hash comparison] capability prior to installing those updates;*
 - *Ability to configure the authentication failure parameters for FIA_AFL.1;*
- [
- *Ability to start and stop services;*
 - *Ability to configure audit behavior;*
 - *Ability to manage cryptographic keys;*
 - *Ability to configure thresholds for SSH rekeying;*
 - *Ability to set the time which is used for time-stamps].*

5.4.4 Security management roles (FMT_SMR)

5.4.4.1 *FMT_SMR.2 Restrictions on security roles*

FMT_SMR.2 Restrictions on Security Roles

FMT_SMR.2.1 The TSF shall maintain the roles:

- *Security Administrator.*

FMT_SMR.2.2 The TSF shall be able to associate users with roles.

FMT_SMR.2.3 The TSF shall ensure that the conditions

- *The Security Administrator role shall be able to administer the TOE locally;*
- *The Security Administrator role shall be able to administer the TOE remotely*

are satisfied.

5.5 Protection of the TSF (FPT)

5.5.1 Protection of TSF Data (Extended – FPT_SKP_EXT)

5.5.1.1 *FPT_SKP_EXT.1 Protection of TSF Data (for reading of all pre-shared, symmetric and private keys)*

FPT_SKP_EXT.1 Protection of TSF Data (for reading of all pre-shared, symmetric and private keys)

FPT_SKP_EXT.1.1 The TSF shall prevent reading of all pre-shared keys, symmetric keys, and private keys.

5.5.2 Protection of Administrator Passwords (Extended – FPT_APW_EXT)

5.5.2.1 FPT_APW_EXT.1 Protection of Administrator Passwords

FPT_APW_EXT.1 Protection of Administrator Passwords

FPT_APW_EXT.1.1 The TSF shall store administrative passwords in non-plaintext form.

FPT_APW_EXT.1.2 The TSF shall prevent the reading of plaintext administrative passwords.

5.5.3 TSF testing (Extended – FPT_TST_EXT)

5.5.3.1 FPT_TST_EXT.1 TSF Testing (Extended)

FPT_TST_EXT.1 TSF testing

FPT_TST_EXT.1.1 The TSF shall run a suite of the following self-tests [*during initial start-up (on power on)*] to demonstrate the correct operation of the TSF: [

- *Power on test,*
- *File integrity test,*
- *Crypto integrity test,*
- *Authentication test,*
- *Algorithm known answer tests].*

5.5.4 Trusted Update (FPT_TUD_EXT)

5.5.4.1 FPT_TUD_EXT.1 Trusted Update

FPT_TUD_EXT.1 Trusted update

FPT_TUD_EXT.1.1 The TSF shall provide *Security Administrators* the ability to query the currently executing version of the TOE firmware/software and [*no other TOE firmware/software version*].

FPT_TUD_EXT.1.2 The TSF shall provide *Security Administrators* the ability to manually initiate updates to TOE firmware/software and [*no other update mechanism*].

FPT_TUD_EXT.1.3 The TSF shall provide means to authenticate firmware/software updates to the TOE using a [*published hash*] prior to installing those updates.

5.5.5 Time stamps (Extended – FPT_STM_EXT)

5.5.5.1 FPT_STM_EXT.1 Reliable Time Stamps

FPT_STM_EXT.1 Reliable Time Stamps

FPT_STM_EXT.1.1 The TSF shall be able to provide reliable time stamps for its own use.

FPT_STM_EXT.1.2 The TSF shall [*allow the Security Administrator to set the time*].

5.6 TOE Access (FTA)

5.6.1 TSF-initiated Session Locking (Extended – FTA_SSL_EXT)

5.6.1.1 FTA_SSL_EXT.1 TSF-initiated Session Locking

FTA_SSL_EXT.1 TSF-initiated Session Locking

FTA_SSL_EXT.1.1 The TSF shall, for local interactive sessions, [

- [*terminate the session*]

after a Security Administrator-specified time period of inactivity.

5.6.2 Session locking and termination (FTA_SSL)

5.6.2.1 FTA_SSL.3 TSF-initiated Termination (Refinement)

FTA_SSL.3 TSF-initiated Termination

FTA_SSL.3.1: The TSF shall terminate a **remote** interactive session after a *Security Administrator configurable time interval of session inactivity*.

5.6.2.2 FTA_SSL.4 User-initiated Termination (Refinement)

FTA_SSL.4 User-initiated Termination

FTA_SSL.4.1: The TSF shall allow **Administrator**-initiated termination of the **Administrator's** own interactive session.

5.6.3 TOE access banners (FTA_TAB)

5.6.3.1 FTA_TAB.1 Default TOE Access Banners (Refinement)

FTA_TAB.1 Default TOE Access Banners

FTA_TAB.1.1: Before establishing an **administrative user** session the TSF shall display a **Security Administrator-specified** advisory **notice and consent** warning message regarding use of the TOE.

5.7 Trusted path/channels (FTP)

5.7.1 Trusted Channel (FTP_ITC)

5.7.1.1 FTP_ITC.1 Inter-TSF trusted channel (Refinement)

FTP_ITC.1 Inter-TSF trusted channel

FTP_ITC.1.1 The TSF shall **be capable of using [SSH]** to provide a trusted communication channel between itself and **authorized IT entities supporting the following capabilities: audit server, [no other capabilities]** that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from **disclosure and detection of modification of the channel data**.

FTP_ITC.1.2 The TSF shall permit **the TSF or the authorized IT entities** to initiate communication via the trusted channel.

FTP_ITC.1.3 The TSF shall initiate communication via the trusted channel for [*no communication*].

5.7.2 Trusted Path (FTP_TRP)

5.7.2.1 FTP_TRP.1/Admin Trusted Path (Refinement)

FTP_TRP.1/Admin Trusted Path

FTP_TRP.1.1/Admin The TSF shall **be capable of using [SSH]** to provide a communication path between itself and **authorized remote Administrators** that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from **disclosure and provides detection of modification of the channel data**.

FTP_TRP.1.2/Admin The TSF shall permit **remote Administrators** to initiate communication via the trusted path.

FTP_TRP.1.3/Admin The TSF shall require the use of the trusted path for *initial Administrator authentication and all remote administration actions.*

6 Security Assurance Requirements

34. The TOE security assurance requirements are taken from [NDcPP2.1], together with the refinements documented in [NDcPP2.1] Section 7, as listed in Table 10 below.

Assurance Class	Assurance Component
Security Target (ASE)	Conformance claims (ASE_CCL.1)
	Extended components definition (ASE_ECD.1)
	ST introduction (ASE_INT.1)
	Security objectives for the operational environment (ASE_OBJ.1)
	Stated security requirements (ASE_REQ.1)
	Security Problem Definition (ASE_SPD.1)
	TOE summary specification (ASE_TSS.1)
Development (ADV)	Basic functional specification (ADV_FSP.1)
Guidance documents (AGD)	Operational user guidance (AGD_OPE.1)
	Preparative procedures (AGD_PRE.1)
Life cycle support (ALC)	Labelling of the TOE (ALC_CMC.1)
	TOE CM coverage (ALC_CMS.1)
Tests (ATE)	Independent testing – conformance (ATE_IND.1)
Vulnerability assessment (AVA)	Vulnerability survey (AVA_VAN.1)

Table 10 Security Assurance Requirements

7 TOE Summary Specification

7.1 Protected communications

35. Local console access is gained by connecting an RJ-45 cable between the console port on the appliance and a workstation with a serial connection client.

7.1.1 Algorithms and zeroization

36. All FIPS-approved cryptographic functions implemented by the TOE are implemented in the following libraries:
- OpenSSL - EX2300/EX3400, version Junos OS 19.1R2
 - LibMD - EX2300/EX3400, version Junos OS 19.1R2
 - Kernel - EX2300/EX3400, version Junos OS 19.1R2
37. All random number generation by the TOE is performed in accordance with NIST Special Publication 800-90 using HMAC_DRBG implemented in the OpenSSL library and kernel library (FCS_RBG_EXT.1.1). Additionally, SHA (256,512) used for password hashing by Junos' MGD daemon is implemented in the LibMD library which is derived from Junos 19.1R2 OpenSSL.
38. **The appliance does not have to be operated with FIPS mode enabled**, providing the following configuration knobs are applied:
- set system services ssh ciphers [aes128-cbc aes256-cbc aes128-ctr aes256-ctr]
 - set system services ssh hostkey-algorithm ssh-rsa
 - set system services ssh hostkey-algorithm ssh-ecdsa
 - set system services ssh hostkey-algorithm no-ssh-ed25519
 - set system services ssh hostkey-algorithm no-ssh-dss
 - set system services macs [hmac-sha1 hmac-sha2-256 hmac-sha2-512]
 - set system services key-exchange [ecdh-sha2-nistp256 ecdh-sha2-nistp384 ecdh-sha2-nistp521]
 - set system services rekey time-limit 60
 - set system services rekey data-limit 1000000000
39. The TOE evaluation provides a CAVP validation certificate for all FIPS-approved cryptographic functions implemented by the TOE. CAVP certificate details are provided in Table 11.

Library	SFRs Supported	Function, Usage, Algorithm, Mode, Key Size	CAVP Cert#
JUNOS 19.1R2 OpenSSL	FCS_SSHS_EXT.1 FCS_COP.1/DataEncryption FCS_COP.1/Hash FCS_COP.1/KeyedHash FCS_COP.1/SigGen FCS_CKM.1 FCS_CKM.2	SSH AES Data Encryption/Decryption: AES-CBC with key sizes 128 bit and 256 bit AES-CTR with key sizes 128 bit and 256 bit SSH Hashing: SHA1, SHA2-256, SHA2-512 SSH Keyed-hashing: HMAC-SHA1, HMAC-SHA-256, HMAC-SHA-512 SSH signature generation and verification using ECDSA: P-256 w/SHA-256, P-384 w/SHA-384, P-521 w/SHA-512 SSH Key generation for ECDH P-256, P-384, P-521 SSH EC Key Agreement including keypair generation using: EC (P-256, SHA-256), ED (P-384, SHA-384), EE (P-521, SHA-512)	C1376
	FCS_SSHS_EXT.1 FCS_COP.1/SigGen FCS_CKM.1	RSA KeyGen (generation mode B.3.3) for SSH host keys: Modulo 2048 Modulo3072 RSA SigGen (signature type: PKCS 1.5) for SSH: Modulo 2048, Hash Algorithm SHA2-256, SHA2-512 Modulo 3072, Hash Algorithm SHA2-256, SHA2-512 Modulo 4096, Hash Algorithm SHA2-256, SHA2-512 RSA SigVer (signature type: PKCS 1.5) for SSH: Modulo 2048, Hash Algorithm SHA2-256, SHA2-512 Modulo 3072, Hash Algorithm SHA2-256, SHA2-512	C1376

Library	SFRs Supported	Function, Usage, Algorithm, Mode, Key Size	CAVP Cert#
JUNOS 19.1R2 LibMD	FCS_COP.1/Hash FPT_APW_EXT.1 FPT_TST_EXT.1	Used by veriexec for cryptographic hashing for password conditioning, password hashing sha256, sha512 Used by manifest process for self-testing (verifying integrity of system files): sha1, sha256, sha512	C1375
JUNOS 19.1R2 Kernel	FCS_RBG_EXT.1 FCS_COP.1/Hash FCS_COP.1/KeyedHash	Random bit generation with HMAC-DRBG HMAC-SHA2-256	C1374

Table 11 CAVP certificates for cryptographic services

40. The FIPS approved algorithms are applied when the configuration as described in [ECG] is applied². The relevant configuration of algorithms is specified in [ECG].
(FCS_COP.1/DataEncryption, FCS_COP.1/SigGen, FCS_COP.1/Hash, FCS_COP.1/KeyedHash, FCS_RBG_EXT.1, FCS_CKM.1, FMT_SMF.1)
41. Asymmetric keys are also generated in accordance with FIPS PUB 186-4 Appendix B.3 for RSA Schemes and Appendix B.4 for ECC Schemes for SSH communications. The TOE implements Diffie-Hellman group 14, using the modulus and generator specified by Section 3 of RFC3526.
(FCS_CKM.2, FCS_CKM.1).
42. The following table relates cryptographic algorithms to the protocols by the TOE. The TOE acts only as the server for SSH in the supported protocols listed in Table 12:

Protocol	Key Exchange	Authentication	Encryption Algorithms	Data Integrity Algorithms
SSHv2	ecdh-sha2-nistp256 ecdh-sha2-nistp384 ecdh-sha2-nistp521 Diffie-Hellman group 14 (modp 2048)	ssh-rsa rsa-sha2-256, rsa-sha2-512, ecdsa-sha2-nistp256 ecdsa-sha2-nistp384 ecdsa-sha2-nistp521	AES CTR 128 AES CTR 256 AES CBC 128 AES CBC 256	HMAC-SHA-1 HMAC-SHA-256 HMAC-SHA-512

Table 12 Supported Protocols

43. Regardless of the module, the HMAC algorithms in Table 12 use the values specified in Table 13:

	HMAC-SHA-1	HMAC-SHA-256	HMAC-SHA-512
Key Length	160 bits	256 bits	512 bits
Hash function	SHA-1	SHA-256	SHA-512
Block Size	512 bits	512 bits	1024 bits
Output MAC	160 bits	256 bits	512 bits

Table 13 HMAC Values

44. Junos OS handles zeroization for all CSP, plaintext secret and private cryptographic keys according to Table 14 below. **(FCS_CKM.4).**

² The knob “set system fips level 1” will enforce strict compliance to FIPS and enable restrictions on algorithms and keys sizes as required by FIPS requirements. FIPS-mode may be applied, but is not mandated to comply with operation of the TOE in accordance with [ECG].

CSP	Description	Method of storage	Storage location	Zeroization Method
SSH Private Host Key	The first time SSH is configured, the key is generated. Used to identify the host.	Plaintext	File format on SDD)	When the appliance is recommissioned, the config files (including CSP files such as SSH keys) are removed using the “request system zeroize” option.
	Loaded into memory to complete session establishment	Plaintext	Memory	Memory free() operation is performed by Junos upon session termination
SSH Session Key	Session keys used with SSH, AES 128, 256, hmac-sha-1, hmac-sha2-256 or hmac-sha2-512 key (160, 256 or 512), DH Private Key (2048 or elliptic curve 256/384/521-bits)	Plaintext	Memory	Memory free() operation is performed by Junos upon session termination
User Password	Plaintext value as entered by user	Plaintext as entered	Processed in Memory	Memory free() operation is performed by Junos upon completion of authentication
		Hashed when stored	Stored on disk	When the appliance is recommissioned, the config files (including the obfuscated password) are removed using the “request system zeroize” option.
RNG State	Internal state and seed key of RNG	Plaintext	Memory	Handled by kernel, overwritten with zero’s at reboot.

Table 14 CSP Storage and Zeroization

45. Junos OS does not provide a CLI interface to permit the viewing of keys. Cryptographic keys are protected through the enforcement of kernel-level file access rights, limiting access to the contents of cryptographic key containers to processes with cryptographic rights or shell users with root permission³. (*FPT_SKP_EXT.1*)

7.1.2 Random Bit Generation

46. Junos OS performs random bit generation in accordance with NIST Special Publication 800-90 using HMAC_DRBG, SHA-256. The RBG is seeded from a single hardware source and three software sources⁴:
- **RANDOM_NET_ETHER**: This software source of entropy is associated with network activity. Timings (CPU counter values at the time of the event) together with internal representation of network packets are used to harvest entropy from this source and is further fed into the HMAC DRBG
 - **RANDOM_FS_ETIME**: This software source of entropy is associated with the time slices during access of the temporary file storage such as a tmpfs in the system. Continuous

³ Security Administrators do not have root permission in shell.

⁴ The calculated min-entropy was between 5.84 and 5.79 bits per byte for hardware sources and between 1.17 and 4.43 for software sources after startup.

process of creation, access and destruction of files in the temporary space in a running system provides randomness.

- **RANDOM_ATTACH:** This software source of entropy is associated with the elapsed cycle count for each device-driver as it attaches to the associated devices in the system and provide entropy during boot-up only.
- **RANDOM_PURE:** This hardware source of entropy is provided by Broadcom chips working in conjunction with the ARM processors, feeding one bit at a time into a 512-bit capture FIFO. The value from the random number generator is post-processed using FIPS186-2 by the ARM Cortex-A9.

7.1.3 SSH

47. Junos OS supports and enforces Trusted Channels that protect the communications between the TOE and a remote audit server from unauthorized disclosure or modification. It also supports Trusted Paths between itself and remote administrators so that the contents of administrative sessions are protected against unauthorized disclosure or modification. (***FTP_ITC.1, FTP_TRP.1/Admin***)
48. Junos OS provides an SSH server to support Trusted Channels using SSHv2 protocol which ensures the confidentiality and integrity of communication with the remote audit server. Export of audit information to a secure, remote server is achieved by setting up an event trace monitor that sends event log messages by using NETCONF over SSH to the remote system event logging server. The remote audit server initiates the connection. The SSHv2 protocol ensures that the data transmitted over a SSH session cannot be disclosed or altered by using the encryption and integrity mechanisms of the protocol with the FIPS cryptographic module. (***FTP_ITC.1, FCS_SSHS_EXT.1***)
49. The Junos OS SSH Server also supports Trusted Paths using SSHv2 protocol which ensures the confidentiality and integrity of user sessions. The encrypted communication path between Junos OS SSH Server and a remote administrator is provided by the use of an SSH session. Remote administrators of Junos OS initiate communication to the Junos CLI through the SSH tunnel created by the SSH session. Assured identification of Junos OS is guaranteed by using public key based authentication for SSH. The SSHv2 protocol ensures that the data transmitted over a SSH session cannot be disclosed or altered by using the encryption and integrity mechanisms of the protocol with the FIPS cryptographic module. (***FTP_TRP.1/Admin, FCS_SSHS_EXT.1***)
50. The Junos OS SSH server is implemented in accordance with RFCs 4251, 4252, 4253, 4254, 4344, 5656 and 6668. Junos OS provides assured identification of the Junos OS appliance through public key authentication and supports password-based authentication by administrative users (Security Administrator) for SSH connections. The following table identifies conformance to the SSH related RFCs:

RFC	Summary	TOE implementation of Security
RFC 4251	The Secure Shell (SSH) Protocol Architecture	<p>Host Keys: The TOE uses an ECDSA Host Key for SSH v2, with a key size of 256 bits or greater, which is generated on initial setup of the TOE. It can be de-configured via the CLI and the key will be deleted and thus unavailable during connection establishment. This key is randomly generated to be unique to each TOE instance. The TOE presents the client with its public key and the client matches this key against its known_hosts list of keys. When a client connects to the TOE, the client will be able to determine if the same host key was used in previous connections, or if the key is different (per the SSHv2 protocol). Junos OS also supports RSA-based key establishment schemes with a key size of 2048 bits.</p> <p>Policy Issues: The TOE implements all mandatory algorithms and methods. The TOE can be configured to accept public-key based authentication and/or password-based authentication. The TOE does not require multiple authentication mechanisms for users. The TOE allows port forwarding and sessions to clients. The TOE has no X11 libraries or applications and X11 forwarding is prohibited.</p> <p>Confidentiality: The TOE does not accept the “none” cipher. Supports AES-CBC-128, AES-CBC-256, AES-CTR-128, AES-CTR-256 encryption algorithms for protection of data over SSH and uses keys generated in accordance with “ssh-rsa”, “rsa-sha2-256”, “rsa-sha2-512”, “ecdsa-sha2-nistp256”, “ecdsa-sha2-nistp384” or “ecdsa-sha2-nistp521” to perform public-key based device authentication. For ciphers whose blocksize ≥ 16, the TOE rekeys every $(2^{32}-1)$ bytes. The client may explicitly request a rekeying event as a valid SSHv2message at any time and the TOE will honor this request. Re-keying of SSH session keys can be configured using the sshd_config knob. The data-limit must be between 51200 and 4294967295 $(2^{32}-1)$ bytes and the time-limit must be between 1 and 1440 minutes. In the evaluated deployment the time-limit must be set within 1 and 60 minutes.</p> <p>Denial of Service: When the SSH connection is brought down, the TOE does not attempt to re-establish it.</p> <p>Ordering of Key Exchange Methods: Key exchange is performed only using one of the supported key exchange algorithms, which are ordered as follows: ecdh-sha2-nistp256, ecdh-sha2-nistp384, ecdh-sha2-nistp521 (all specified in RFC 5656), diffie-hellman-group14-sha1 (specified in RFC 4253).</p> <p>Debug Messages: The TOE sshd server does not support debug messages via the CLI.</p> <p>End Point Security: The TOE permits port forwarding.</p> <p>Proxy Forwarding: The TOE permits proxy forwarding.</p> <p>X11 Forwarding: The TOE does not support X11 forwarding.</p>

RFC	Summary	TOE implementation of Security
RFC 4252	The Secure Shell (SSH) Authentication Protocol	<p>Authentication Protocol: The TOE does not accept the “none” authentication method. The TOE implements a timeout period of 30seconds for authentication of the SSHv2 protocol and provides a limit of three failed authentication attempts before sending a disconnect to the client.</p> <p>Authentication Requests: The TOE does not accept authentication if the requested service does not exist. The TOE does not allow authentication requests for a non-existent username to succeed – it sends back a disconnect message as it would for failed authentications and hence does not allow enumeration of valid usernames. The TOE denies “none” authentication method and replies with a list of permitted authentication methods.</p> <p>Public Key Authentication Method: The TOE supports public key authentication for SSHv2 session authentication. Authentication succeeds if the correct private key is used. The TOE does not require multiple authentications (public key and password) for users.</p> <p>Password Authentication Method: The TOE supports password authentication. Expired passwords are not supported and cannot be used for authentication.</p> <p>Host-Based Authentication: The TOE does not support the configuration of host-based authentication methods.</p>
RFC 4253	The Secure Shell (SSH) Transport Layer Protocol	<p>Encryption: The TOE offers the following for encryption of SSH sessions: aes128-cbc and aes256-cbc, aes128-ctr, aes256-ctr. The TOE permits negotiation of encryption algorithms in each direction. The TOE does not allow the “none” algorithm for encryption.</p> <p>Maximum Packet length: Packets greater than 256Kbytes in an SSH transport connection are dropped and the connection is terminated by Junos OS.</p> <p>Data Integrity: The TOE permits negotiation of HMAC-SHA1 in each direction for SSH transport.</p> <p>Key Exchange: The TOE supports diffie-hellman-group14-sha1.</p> <p>Key Re-Exchange: The TOE performs a re-exchange when SSH_MSG_KEXINIT is received.</p>

RFC	Summary	TOE implementation of Security
RFC 4254	Secure Shell (SSH) Connection Protocol	<p>Multiple channels: The TOE assigns each channel a number (as detailed in RFC 4251, see above).</p> <p>Data transfers: The TOE supports a maximum window size of 256K bytes for data transfer.</p> <p>Interactive sessions: The TOE only supports interactive sessions that do NOT involve X11 forwarding.</p> <p>Forwarded X11 connections: This is not supported in the TOE.</p> <p>Environment variable passing: The TOE only sets variables once the server process has dropped privileges.</p> <p>Starting shells/commands: The TOE supports starting one of shell, application program or command (only one request per channel). These will be run in the context of a channel, and will not halt the execution of the protocol stack.</p> <p>Window dimension change notices: The TOE will accept notifications of changes to the terminal size (dimensions) from the client.</p> <p>Port forwarding: This is fully supported by the TOE.</p>
RFC4344	Secure Shell (SSH) Transport Layer Encryption Modes	<p>Encryption Modes: The TOE implements the recommended modes aes128-ctr and aes256-ctr (it does not implement the recommended modes aes192-ctr or 3des-ctr, nor does it implement any of the optional modes).</p>
RFC5656	SSH ECC Algorithm Integration	<p>ECDH Key Exchange: The support key exchange methods specified in this RFC are ecdh-sha2-nistp256, ecdh-sha2-nistp384, or ecdh-sha2-nistp521. The client matches the key against its known_hosts list of keys.</p> <p>Hashing: Junos OS supports cryptographic hashing via the SHA-256 and SHA-512 algorithms, provided it has a message digest size of either 256 or 512 bits.</p> <p>Required Curves: All required curves are implemented: ecdh-sha2-nistp256, ecdh-sha2-nistp384, or ecdh-sha2-nistp521. None of the Recommended Curves are supported as they are not included in [NDCPP2.1].</p>
RFC 6668	sha2-Transport Layer Protocol	<p>Data Integrity Algorithms: Both the recommended and optional algorithms hmac-sha1, hmac-sha2-256 and hmac-sha2-512 (respectively) are implemented for SSH transport.</p>

Table 15 SSH RFC conformance

7.2 Administrator Authentication

51. Junos OS enforces binding between human users and subjects. The Security Administrator⁵ is responsible for provisioning user accounts, and only the Security Administrator can do so. (*FMT_SMR.2, FMT_MTD.1/CoreData*)
52. Junos users are configured under “system login user” and are exported to the password database ‘/var/etc/master.passwd’. A Junos user is therefore an entry in the password database. Each entry in the password database has fields corresponding to the attributes of “system login user”, including username, (obfuscated) password and login class.
53. The internal architecture supporting Authentication includes an active process, associated linked libraries and supporting configuration data. The Authentication process and library are

⁵ The Security Administrator role is detailed in Section 7.7 below.

- `login()`
 - PAM Library module
54. Following TOE initialization, the `login()` process is listening for a connection at the local console. This 'login' process can be accessed through either direct connection to the local console or following successful establishment of a remote management connection over SSH, when a login prompt is displayed.
 55. This login process identifies and authenticates the user using PAM operations. The login process does two things; it first establishes that the requesting user is whom they claim to be and second provides them with an interactive Junos Command interactive command line interface (CLI).
 56. The SSH daemon supports public key authentication by looking up a public key in an authorized keys file located in the directory `'.ssh'` in the user's home directory (i.e. `~/ssh/`) and this authentication method will be attempted before any other if the client has a key available (**FIA_UIA_EXT.1**). The SSH daemon will ignore the authorized keys file if it or the directory `'.ssh'` or the user's home directory are not owned by the user or are writeable by anyone else.
 57. For password authentication, `login()` interacts with a user to request a username and password to establish and verify the user's identity. The username entered by the administrator at the username prompt is reflected to the screen, but no feedback to screen is provided while the entry made by the administrator at the password prompt until the Enter key is pressed (**FIA_UAU.7**). `login()` uses PAM Library calls for the actual verification of this data. The password is hashed and compared to the stored value, and success/failure is indicated to `login()`, (**FIA_UIA_EXT.1**). PAM is used in the TOE support authentication management, account management, session management and password management. Login primarily uses the session management and password management functionality offered by PAM.
 58. The retry-options can be configured to specify the action to be taken if the administrator fails to enter valid username/password credentials for password authentication when attempting to authenticate via remote access (**FMT_MTD.1/CoreData**). The retry-options are applied following the first failed login attempt for a given username (**FIA_AFL.1**). The length of delay (5-10 seconds) after each failed attempt is specified by the backoff-factor, and the increase of the delay for each subsequent failed attempt is specified by the backoff-threshold (1-3). The tries-before-disconnect sets the maximum number of times (2-10) the administrator is allowed to enter a password to attempt to log in to the device through SSH before the connection is disconnected. The lockout-period sets the amount of time in minutes before the administrator can attempt to log in to the device after being locked out due to the number of failed login attempts (1-43,200 minutes). Even when an account is locked for remote access to the TOE, an administrator is always able to login locally through the serial console and the administrator can attempt authentication via remote access after the maximum timeout period of 24 hours.
 59. The TOE requires users to provide unique identification and authentication data (passwords/public key) before any access to the system is granted. Prior to authentication, the only Junos OS managed responses provided to the administrator are (**FIA_UAU_EXT.2**):
 - Negotiation of SSH session
 - Display of the access banner
 - ICMP echo responses.
 60. Authentication data for fixed password authentication is a case-sensitive, alphanumeric value. The password has a minimum length of 10 characters and maximum length of 20 characters, and must contain characters from at least three different character sets (upper, lower, numeric, punctuation), and can be up to 20 ASCII characters in length (control characters are not

recommended). Any standard ASCII, extended ASCII and Unicode characters can be selected when choosing a password. (**FIA_PMG_EXT.1**)

61. Locally stored authentication credentials are protected (**FPT_APW_EXT.1**):
 - The password is hashed when stored using sha256 or sha512.
 - Authentication data for public key-based authentication methods are stored in a directory owned by the user (and typically with the same name as the user). This directory contains the files '.ssh/authorized_keys' and '.ssh/authorized_keys2' which are used for SSH public key authentication.
 - There is no CLI command provided to retrieve the content of the password file or display a specific password value.
62. Junos enables Security Administrators to configure an access banner for local and remote SSH connections provided with the authentication prompt. The banner can provide warnings against unauthorized access to the secure switch as well as any other information that the Security Administrator wishes to communicate. (**FTA_TAB.1**)
63. User sessions (local and remote) can be terminated by users (**FTA_SSL.4**). The administrative user can logout of existing CLI and remote SSH sessions by typing logout to exit the session and the Junos OS makes the current contents unreadable after the admin initiates the termination. No user activity can take place until the user re-identifies and authenticates.
64. The Security Administrator can set the TOE so that a user session is terminated after a period of inactivity. (**FTA_SSL_EXT.1, FTA_SSL.3**) For each user session Junos OS maintains a count of clock cycles (provided by the system clock) since last activity. The count is reset each time there is activity related to the user session. When the counter reaches the number of clock cycles equating to the configured period of inactivity the user session is locked out.
65. Junos OS overwrites the display device and makes the current contents unreadable after the local interactive session is terminated due to inactivity, thus disabling any further interaction with the TOE. This mechanism is the inactivity timer for administrative sessions. The Security Administrator can configure this inactivity timer on administrative sessions after which the session will be logged out.

7.3 Correct Operation

66. Junos OS runs the following set of self-tests during power on to check the correct operation of the Junos OS firmware (**FPT_TST_EXT.1**):
 - Power on test – determines the boot-device responds, and performs a memory size check to confirm the amount of available memory.
 - File integrity test – verifies integrity of all mounted signed packages, to assert that system files have not been tampered with. To test the integrity of the firmware, the fingerprints of the executables and other immutable files are regenerated and validated against the fingerprints (SHA-1, SHA256, SHA-512) contained in the manifest file.
 - Crypto integrity test – checks integrity of major CSPs, such as SSH hostkeys.
 - Authentication error – verifies that verixec is enabled and operates as expected using /opt/sbin/kats/cannot-exec.real.
 - Kernel, libmd, OpenSSL – verifies correct output from known answer tests for appropriate algorithms.
67. Juniper Networks devices run only binaries supplied by Juniper Networks. Within the package, each Junos OS firmware image includes fingerprints of the executables and other immutable

files. Junos firmware will not execute any binary without a validating registered fingerprint. This feature protects the system against unauthorized firmware and activity that might compromise the integrity of the device. These self-tests ensure that only authorized executables are allowed to run thus ensuring the correct operation of the TOE.

68. In the event of a transiently corrupt state or failure condition, the system will panic; the event will be logged and the system restarted, having ceased to process network traffic. When the system restarts, the system boot process does not succeed without passing all applicable self-tests. This automatic recovery and self-test behavior, is discussed in Chapter 11 of the [ECG].
69. When any self-test fails, the device halts in an error state. No command line input or traffic to any interface is processed. The device must be power cycled to attempt to return to operation. This self-test behavior is discussed in [ECG]. (**FPT_TST_EXT.1**)

7.4 Trusted Update

70. Security Administrators are able to query the current version of the TOE firmware using the CLI command “show version” (**FPT_TUD_EXT.1**) and, if a new version of the TOE firmware is available, initiate an update of the TOE firmware. Junos OS does not provide partial updates for the TOE, customers requiring updates must migrate to a subsequent release. Updates are downloaded and applied manually (there is no automatic updating of the Junos OS). (**FPT_TUD_EXT.1, FMT_SMF.1, FMT_MOF.1/ManualUpdate**.)
71. The installable firmware package containing the Junos OS can be manually verified against a published hash value when the Security Administrator attempts to install the package. When installing the firmware packages, the Security Administrator must verify the published hash on the update package before uploading it to the TOE. If the hash is found not to match the published value, the update should be considered invalid.

7.5 Protection of Cryptographic Keys

72. Access to flash memory requires administrator credentials. Cryptographic keys are protected through the enforcement of kernel-level file access rights, limiting access to the contents of cryptographic key containers to processes with cryptographic rights. The TOE does not provide a CLI interface to permit the viewing of keys.
73. (**FMT_MTD.1/CryptoKeys**)

7.6 Audit

74. Junos OS creates and stores audit records for the following events (the detail of content recorded for each audit event is detailed in 10 (**FAU_GEN.1**). Auditing is implemented using syslog.
 - Start-up and shut-down of the audit functions
 - Administrative login and logout
 - Configuration is committed
 - Configuration is changed (includes all management activities of TSF data)
 - Generating/import of, changing, or deleting of cryptographic keys (see below for more detail)
 - Resetting passwords
 - Starting and stopping services
 - All use of the identification and authentication mechanisms

- Unsuccessful login attempts limit is met or exceeded
 - Any attempt to initiate a manual update
 - Result of the update attempt (success or failure)
 - The termination of a local/remote/interactive session by the session locking mechanism
 - Initiation/termination/failure of the SSH trusted channel to syslog server
 - Initiation/termination/failure of the SSH trusted path with Admin
75. In addition the following management activities of TSF data are recorded:
- configure the access banner;
 - configure the session inactivity time before session termination;
 - configure the authentication failure parameters for FIA_AFL.1;
 - Ability to configure audit behaviour;
 - configure the cryptographic functionality;
 - configure thresholds for SSH rekeying;
 - set the time which is used for time-stamps.
76. The detail of what events are to be recorded by syslog are determined by the logging level specified the “level” argument of the “set system syslog” CLI command. To ensure compliance with the requirements the audit knobs detailed in [ECG] must be configured.
77. As a minimum, Junos OS records the following with each log entry:
- date and time of the event and/or reaction
 - type of event and/or reaction
 - subject identity (where applicable)
 - the outcome (success or failure) of the event (where applicable).
78. In order to identify the key being operated on, the following details are recorded for all administrative actions relating to cryptographic keys (generating, importing, changing and deleting keys):
- SSH key configured for SSH public key authentication –the hash of the public key that is to be used for authentication is recorded in syslog
 - SSH keys configured for outbound trusted channel to external syslog server –the hash of the public key that is to be used for authentication is recorded in syslog
 - adding, replacing or removing trust anchors in the TOE's trust store.
79. All events recorded by syslog are timestamped. The clock function of Junos OS provides a source of date and time information for the appliance, used in audit timestamps, which is maintained using the hardware Time Stamp Counter as the clock source. (**FAU_GEN.2, FPT_STM_EXT.1**)
80. Syslog can be configured to store the audit logs locally (**FAU_STG_EXT.1**), and optionally to send them to one or more syslog log servers in real time via Netconf over SSH (**FAU_STG.1, FMT_MOF.1/Functions**). Local audit log are stored in /var/log/ in the underlying filesystem. Only a Security Administrator can read log files, or delete log and archive files through the CLI interface or through direct access to the filesystem having first authenticated as a Security Administrator. Modification of the audit logs is limited to those administrators with permission

to access the filesystem directly, such as the Security Administrator. The syslogs are automatically deleted locally according to configurable limits on storage volume. The default maximum size is 1Gb. The default maximum size can be modified by the user, using the “size” argument for the “set system syslog” CLI command.

81. The Junos OS defines an active log file and a number of “archive” files (10 by default, but configurable from 1 to 1000). When the active log file reaches its maximum size, the logging utility closes the file, compresses it, and names the compressed archive file ‘logfile.0.gz’. The logging utility then opens and writes to a new active log file. When the new active log file reaches the configured maximum size, ‘logfile.0.gz’ is renamed ‘logfile.1.gz’, and the active log file is closed, compressed, and renamed ‘logfile.0.gz’. When the maximum number of archive files is reached and when the size of the active file reaches the configured maximum size, the contents of the oldest archived file are deleted so the current active file can be archived.
82. A 1Gb syslog file takes approximately 0.25Gb of storage when archived. Syslog files can acquire complete storage allocated to /var filesystem, which is platform specific. However, when the filesystem reaches 92% storage capacity an event is raised to the administrator but the eventd process (being a privileged process) still can continue using the reserved storage blocks. This allows the syslog to continue storing events while the administrator frees the storage. If the administrator does not free the storage in time and the /var filesystem storage becomes exhausted a final entry is recorded in the log reporting “No space left on device” and logging is terminated. The appliance continues to operate in the event of exhaustion of audit log storage space.

7.7 Management

83. Accounts assigned to the Security Administrator role are used to manage Junos OS in accordance with [NDcPP2.1]. User accounts in the TOE have the following attributes: user identity (user name), authentication data (password) and role (privilege). The Security Administrator is associated with the defined login class “security-admin”, which has the necessary permission set to permit the administrator to perform all tasks necessary to manage Junos OS in accordance with the requirements of [NDcPP2.1]. (**FMT_SMR.2**)
84. The TOE provides user access either through the system console or remotely over the Trusted Path using the SSHv2 protocol. Users are required to provide unique identification and authentication data before any access to the system is granted, as detailed in Section 7.2 above. (**FMT_SMR.2, FMT_SMF.1**)
85. The Security Administrator has the capability to:
 - Administer the TOE locally via the serial ports on the physical device or remotely over an SSH connection.
 - Initiate a manual update of TOE firmware (**FMT_MOF.1/ManualUpdate**):
 - Query currently executing version of TOE firmware (**FPT_TUD_EXT.1**)
 - Verify update using published hash (**FPT_TUD_EXT.1**)
 - Manage Functions:
 - Transmission of audit data to an external IT entity, including Start/stop and modify the behaviour of the trusted communication channel to external syslog server (netconf over SSH) and the trusted path for remote Administrative sessions (SSH) (**FMT_MOF.1/Functions, FMT_MOF.1/Services, FMT_SMF.1**)
 - Handling of audit data, including setting limits of log file size (**FMT_MOF.1/Functions**)
 - Manage TSF data (**FMT_MTD.1/CoreData**)

- Create, modify, delete administrator accounts, including configuration of authentication failure parameters
 - Reset administrator passwords
 - Re-enable an Administrator account (**FIA_AFL.1**);
 - Manage crypto keys (**FMT_MTD.1/CryptoKeys**):
 - SSH key generation (ecdsa, ssh-rsa)
 - Perform management functions (**FMT_SMF.1**):
 - Configure the access banner (**FTA_TAB.1**)
 - Configure the session inactivity time before session termination or locking, including termination of session when serial console cable is disconnected (**FTA_SSL_EXT.1, FTA_SSL.3**)
 - Manage cryptographic functionality (**FCS_SSHS_EXT.1**), including:
 - ssh ciphers
 - hostkey algorithm
 - key exchange algorithm
 - hashed message authentication code
 - thresholds for SSH rekeying
 - Set the system time (**FPT_STM_EXT.1**)
86. Detailed topics on the secure management of Junos OS are discussed in [ECG].

8 Rationales

8.1 SFR dependency analysis

The dependencies between SFRs implemented by the TOE are satisfied as demonstrated in [NDcPP2.1] Appendix E.1.

Security Functional Requirement	Dependency	Rationale
FAU_GEN.1	FPT_STM.1	FPT_STM_EXT.1 included (which is hierarchical to FPT_STM.1)
FAU_GEN.2	FAU_GEN.1 FIA_UID.1	FAU_GEN.1 Included Satisfied by FIA_UIA_EXT.1, which specifies the relevant Administrator identification timing
FAU_STG_EXT.1	FAU_GEN.1 FTP_ITC.1	FAU_GEN.1 included FTP_ITC.1 included
FAU_STG.1	FAU_GEN.1	FAU_GEN.1 Included
FCS_CKM.1	FCS_CKM.2 or FCS_COP.1 FCS_CKM.4	FCS_CKM.2 included FCS_CKM.4 included
FCS_CKM.2	FTP_ITC.1 or FTP_ITC.2 or FCS_CKM.1 FCS_CKM.4	FCS_CKM.1 included (also FTP_ITC.1 as a secure channel that could be used for import) FCS_CKM.4 included
FCS_CKM.4	FTP_ITC.1 or FTP_ITC.2 or FCS_CKM.1	FCS_CKM.1 included (also FTP_ITC.1 as a secure channel that could be used for import)
FCS_COP.1/DataEncryption	FTP_ITC.1 or FTP_ITC.2 or FCS_CKM.1 FCS_CKM.4	FCS_CKM.1 included (also FTP_ITC.1 as a secure channel that could be used for import) FCS_CKM.4 included
FCS_COP.1/SigGen	FTP_ITC.1 or FTP_ITC.2 or FCS_CKM.1 FCS_CKM.4	FCS_CKM.1 included (also FTP_ITC.1 as a secure channel that could be used for import) FCS_CKM.4 included
FCS_COP.1/Hash	FTP_ITC.1 or FTP_ITC.2 or FCS_CKM.1 FCS_CKM.4	FCS_CKM.1 included (also FTP_ITC.1 as a secure channel that could be used for import) FCS_CKM.4 included
FCS_COP.1/KeyedHash	FTP_ITC.1 or FTP_ITC.2 or FCS_CKM.1 FCS_CKM.4	FCS_CKM.1 included (also FTP_ITC.1 as a secure channel that could be used for import) FCS_CKM.4 included
FCS_RBG_EXT.1	None	n/a
FCS_SSHS_EXT.1	FCS_CKM.1 FCS_CKM.2 FCS_COP.1/DataEncryption FCS_COP.1/SigGen FCS_COP.1/Hash FCS_COP.1/KeyedHash FCS_RBG_EXT.1	FCS_CKM.1 included FCS_CKM.2 included FCS_COP.1/DataEncryption included FCS_COP.1/SigGen included FCS_COP.1/Hash included FCS_COP.1/KeyedHash included FCS_RBG_EXT.1 included

Security Functional Requirement	Dependency	Rationale
FIA_AFL.1	FIA_UAU.1	Satisfied by FIA_UIA_EXT.1, which specifies the relevant Administrator authentication
FIA_PMG_EXT.1	None	n/a
FIA_UIA_EXT.1	FTA_TAB.1	FTA_TAB.1 included
FIA_UAU_EXT.2	None	n/a
FIA_UAU.7	FIA_UAU.1	Satisfied by FIA_UIA_EXT.1, which specifies the relevant Administrator authentication
FMT_MOF.1/ManualUpdate	FMT_SMR.1 FMT_SMF.1	FMT_SMR.2 included FMT_SMF.1 included
FMT_MOF.1/Services	FMT_SMR.1 FMT_SMF.1	FMT_SMR.2 included FMT_SMF.1 included
FMT_MOF.1/Functions	FMT_SMR.1 FMT_SMF.1	FMT_SMR.2 included FMT_SMF.1 included
FMT_MTD.1/CoreData	FMT_SMR.1 FMT_SMF.1	FMT_SMR.2 included FMT_SMF.1 included
FMT_MTD.1/CryptoKeys	FMT_SMR.1 FMT_SMF.1	FMT_SMR.2 included FMT_SMF.1 included
FMT_SMF.1	None	n/a
FMT_SMR.2	FIA_UID.1	Satisfied by FIA_UIA_EXT.1, which specifies the relevant Administrator authentication
FPT_SKP_EXT.1	None	n/a
FPT_APW_EXT.1	None	n/a
FPT_TST_EXT.1	None	n/a
FPT_TUD_EXT.1	FCS_COP.1/SigGen or FCS_COP.1/Hash	FCS_COP.1/Hash
FPT_STM_EXT.1	None	n/a
FTA_SSL_EXT.1	FIA_UID.1	Satisfied by FIA_UIA_EXT.1, which specifies the relevant Administrator authentication
FTA_SSL.3	None	n/a
FTA_SSL.4	None	n/a
FTA_TAB.1	None	n/a
FTP_ITC.1	None	n/a
FTP_TRP.1/Admin	None	n/a

Table 16 SFR Dependency Analysis

9 Glossary

AES	Advanced Encryption Standard
ANSI	American National Standards Institute
API	Application Program Interface
cPP	collaborative Protection Profile
CCM	Counter with Cipher Block Chaining-Message Authentication Code
CFP	C Form-factor Pluggable
CSP	Critical security parameter
DH	Diffie Hellman
EAL	Evaluation Assurance Level
ECC	Elliptic Curve Cryptography
ECDSA	Elliptic Curve Digital Signature Algorithm
EP	Extended Package, defined in [CC1]
ESP	Encapsulating Security Payload
FFC	Finite Field Cryptography
FIPS	Federal Information Processing Standard
HMAC	Keyed-Hash Authentication Code
I&A	Identification and Authentication
ID	Identification
IETF	Internet Engineering Task Force
IP	Internet Protocol
IPv6	Internet Protocol Version 6
ISO	International Organization for Standardization
IT	Information Technology
Junos	Juniper Operating System
MIC	Modular Interface Cards
MPC	Modular Port Concentrator
MS-MPC	MultiServices Modular Port Concentrator
NAT	Network Address Translation
NDcPP	Network Device collaborative Protection Profile
NTP	Network Time Protocol
OSI	Open Systems Interconnect
OSP	Organizational Security Policy
PAM	Pluggable Authentication Module
PFE	Packet Forwarding Engine
PIC/PIM	Physical Interface Card/Module
PKI	Public Key Infrastructure
POE	Power over Ethernet
PP	Protection Profile
PRNG	Pseudo Random Number Generator
RE	Routing Engine
RFC	Request for Comment
RNG	Random Number Generator
RSA	Rivest, Shamir, Adelman
SA	Security Association
SFP	Small Form-factor Pluggable
SFR	Security Functional Requirement
SHA	Secure Hash Algorithm
SNMP	Simple Network Management Protocol
SSH	Secure Shell

SSL	Secure Sockets Layer
ST	Security Target
TOE	Target of Evaluation
TSF	TOE Security Functionality
TSFI	TSF interfaces
UDP	User Datagram Protocol